Appendix to the operating instructions für hose assemblies

Installation recommendation für hose assemblies

A **Hose assemblies should always be unrolled and not pulled.**

incorrect CORRECT incorrect CORRECT

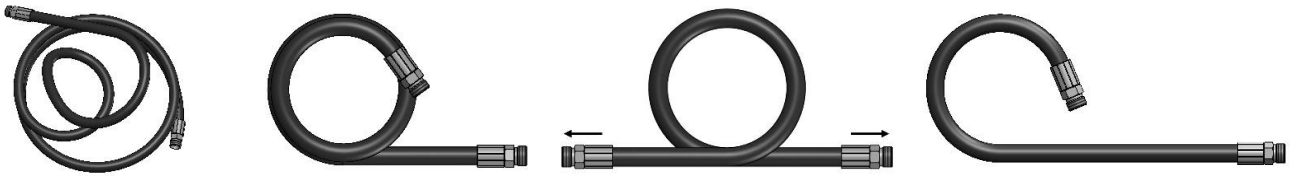

B **When using hose assemblies, always ensure the correct installation length; they must not be too short (pay attention to the bending radius).**

incorrect CORRECT incorrect CORRECT

C **Hose assemblies must not be bent over, so pipe bends should be installed as a deflection.**

incorrect CORRECT incorrect CORRECT

D **Install hose assemblies so that they are free of torsion; they must not be twisted.**

incorrect CORRECT incorrect CORRECT

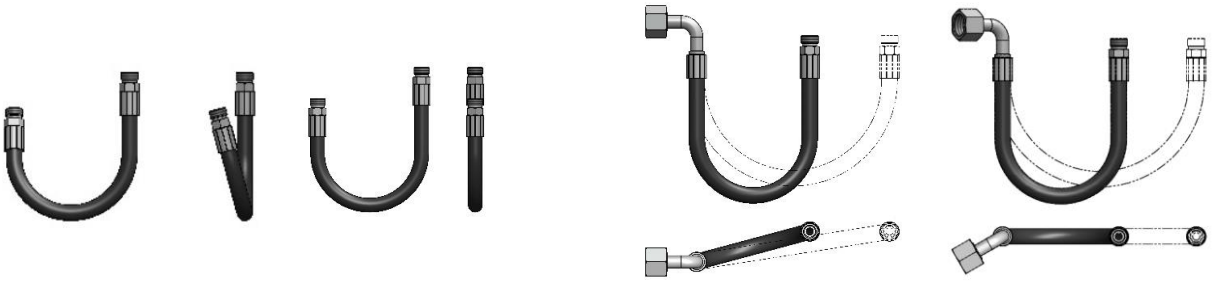

E **Hose assemblies must not kink. If necessary, a hose saddle or anti-kink protection can be used.**

incorrect CORRECT incorrect CORRECT CORRECT

This is a service provided by the VTH specialist group “Hose, Fittings and Fluid Technology”.
These non-binding installation recommendations for hose assemblies are intended only as a guide.
They do not claim to be complete and are the sole responsibility of the operator.